


WHILTON MILL

SET UP GUIDE

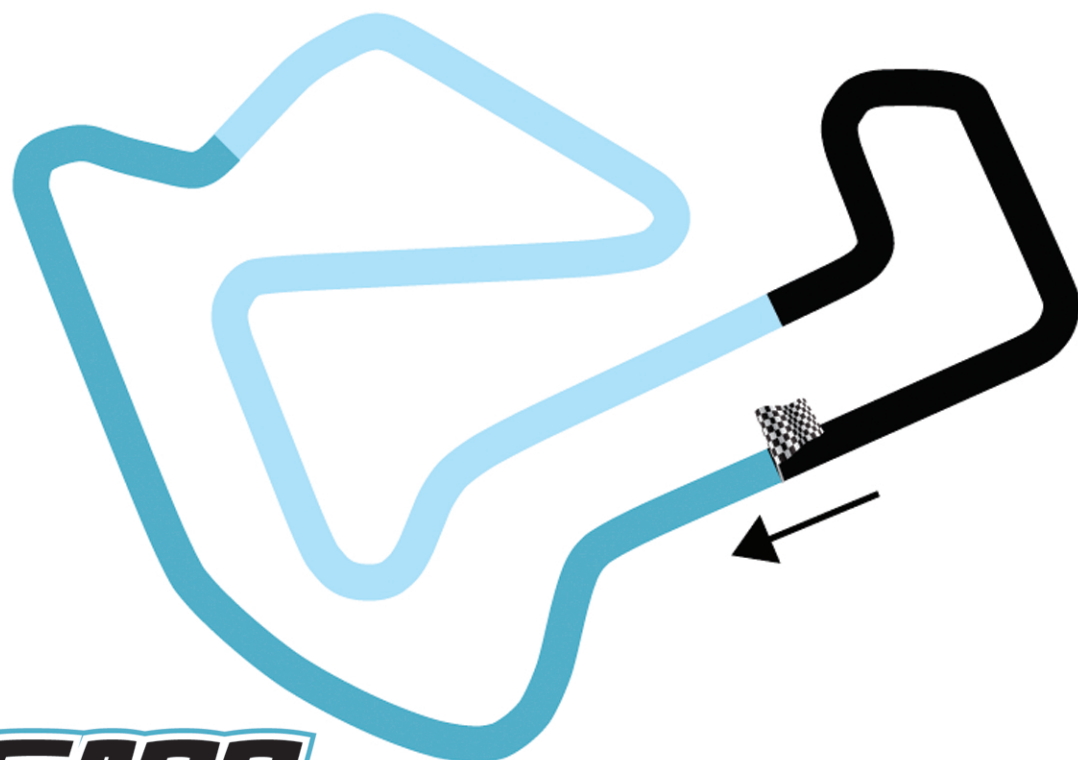

DRS100

DRY SET UP:

- Front use minimum of 40mm front spacers on inside/ rear track 138.5cm to 139.5cm.
- Tyre pressure dry range guide 10 to 12 psi.
- Always use the same pressure in the fronts and rears. Look for a working pressure gain of 1 to 2 psi.

WET SET UP:

As it is so cold these will be higher than normal.

- Full spacers inside front wheels - rear track 135 to 136cm.

TYRE PRESSURES:

- 14 psi grease, 22 psi wet and for monsoon wet 28 psi.
- Carb setting start 50mins to 60mins low jet - main jet 83/84.
- Exhaust flex 60mm - 70mm.
- Designated sprocket size: 83T recommended chain length CZ 104L.

DRS

DANIELRICCIARDOSERIES