


HOOTON PARK

SET UP GUIDE

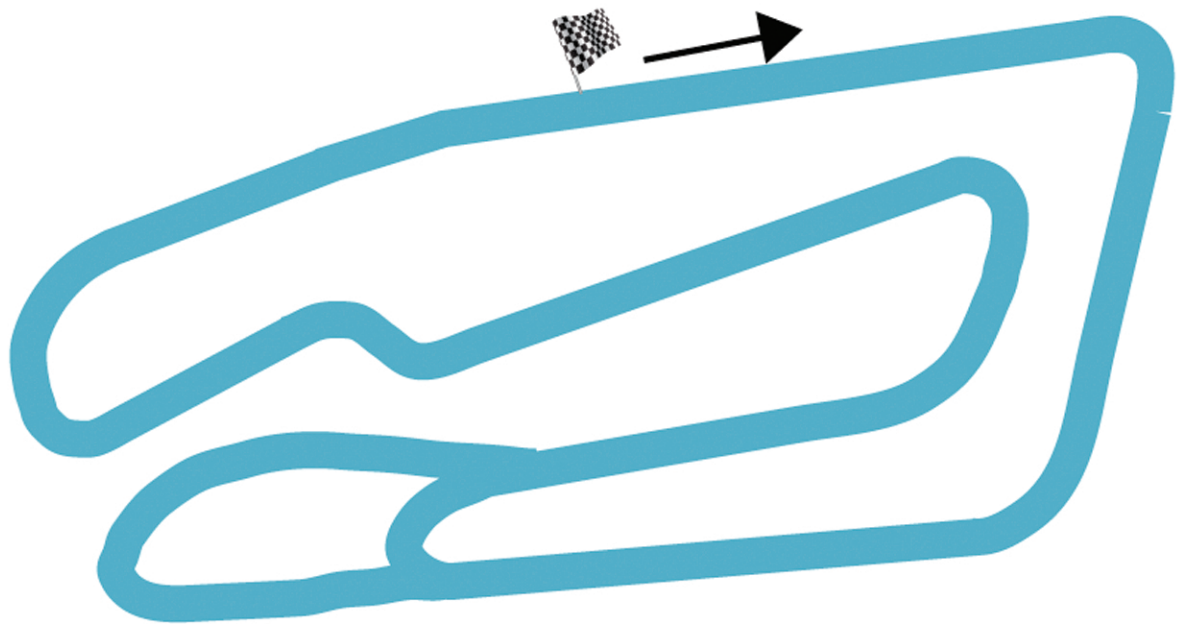

DRS100

DRY SET UP:

- Front wheels use minimum of 40mm front spacers on inside
- Stub axle position for track rods “outer holes”
- Rear track 138.5 - 139.5cm
- 3rd bearing tight but without grub screws
- Tyre pressure dry range guide: 9 PSI to 11 PSI
- Always use the same pressure in the fronts and rears.
Look for a working pressure gain of 1 to 2 psi

WET SET UP:

- Full spacers on inside of front rims
- Rear track: 135cms to 136cms.

TYRE PRESSURES:

- Greasy 12 psi Wet 16 psi Very Wet Monsoon 20psi
- In very wet conditions it is possible to run 8mm to 10mm
“Toe Out” on your front tracking for more turnin.
- Carb setting start: 60 mins low jet - main jet 83.
- Exhaust flex: 80mm
- Designated sprocket size:
80T recommended chain length
CZ 104 - 106L

DRS

DANIELRICCIARDOSERIES