


GLAN Y GORS

SET UP GUIDE

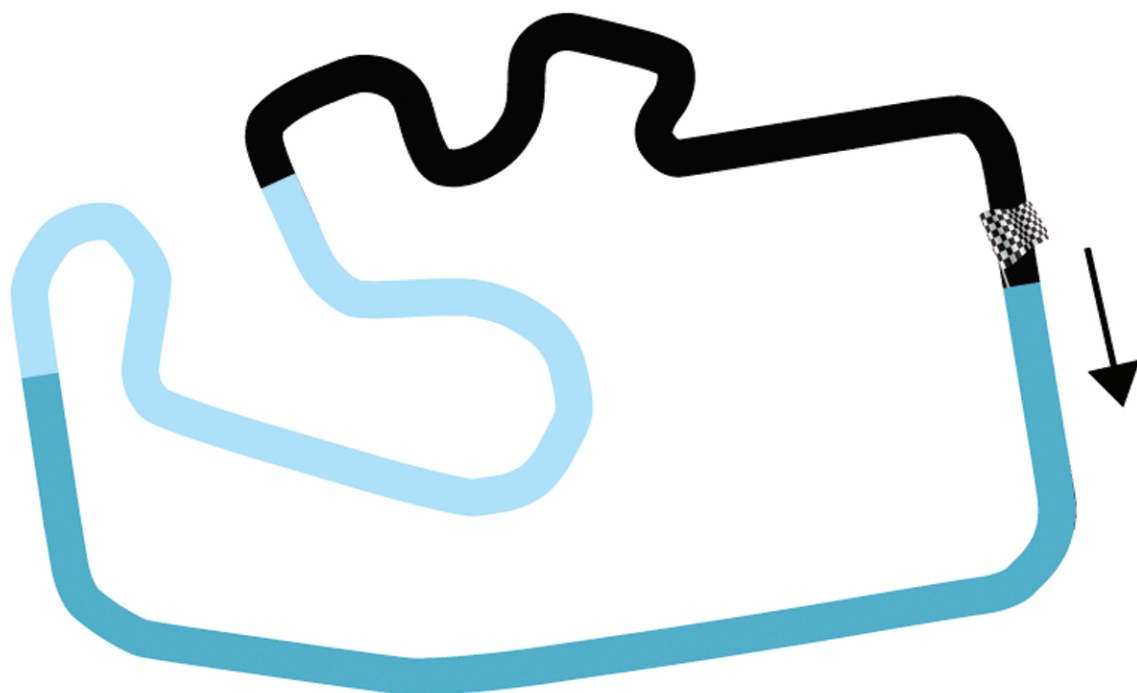

DRS125

DRY SET UP:

- Front wheel spacers use minimum of 40mm spacers on inside on front rims
- Rear wheel overall width: 138cms to 139.5cms
- Tyre pressure dry range guide 9psi - 11 psi.
- Always use the same pressure in the fronts and rears.
Look for a working pressure gain of 1 to 2 psi

WET SET UP:

- Full spacers inside front rim
- Rear wheel overall track: 135cms to 136cms
- In very wet conditions try running 5 to 8 mm toe out on front tracking to increase grip on turn in.

TYRE PRESSURES:

- Grease 12 psi wet 15 psi and for monsoon wet 18 psi
- Carb setting start off with 65mins low jet - main jet 89/90
- Designated Sprocket rear size 76t - chain length CZ 100L
- Flex length: 60mm to 65mm

DRS

DANIELRICCIARDOSERIES